

## HIDC-2600TV

www.asia.security.honeywell.com

### 1080P High Definition H.264 IP Dome Camera

Honeywell HIDC-2600TV combines world-class imaging and the latest IP camera technology with IP networking innovation, providing streaming images at full frame rate at 1080P resolution. With advanced resolution projection, the HIDC-2600TV delivers high quality images, making it an ideal solution for high-end surveillance applications.

Featuring H.264 high profile compression format, the HIDC-2600TV saves network bandwidth and storage even for high frame rate recording. The 2.8 – 12mm vari-focal DC-IRIS lens allows the field of view to be adjusted to match the scene requirements.

The HIDC-2600TV is equipped with built-in Power over Ethernet (IEEE 802.3af), which allows power to be supplied to the camera using the network, eliminating the need for a separate power supply and reducing the cost of installation. For additional installation flexibility, the HIDC-2600TV can also be powered with DC 12V and AC 24V.

#### Market Opportunities

Featuring 1080P high resolution, H.264 compression format, PoE and ONVIF interface, the HIDC-2600TV optimizes surveillance performance for applications that require excellent image clarity and high-definition imaging at minimal bandwidth. The camera is most suitable for advanced applications such as metro, banks, railways, financial institutes, government buildings, airports etc.

#### FEATURES

- 1080P high definition
- H.264, and MJPEG simultaneously (Dual-encoders)
- H.264 high profile – saves bandwidth and storage
- True Day/Night (with IR-cut filter)
- WDR, 3DNR, DC IRIS, and Anti-flicker
- Comprehensive I/O ports: audio in, audio out, video out, Alarm In, Alarm Out, RJ45, TF, RS485
- Built in Power over Ethernet (PoE); 100Base-T Ethernet
- Event triggering – camera tampering, Motion detection, Network loss, Alarm Input, Video Loss
- Event trigger action – SNAP, Record video in SD card, send to FTP, send to Email, External output activation, voice alert, notify to CMS
- Edge storage – up to 32G
- Compatible with Honeywell Universal Surveillance (HUS) Platform and NVRs
- ONVIF Profile S compliant



Ceiling mount bracket available



Driving IP-based physical security through global standardization



# HIDC-2600TV

www.asia.security.honeywell.com

## 1080P High Definition H.264 IP Dome Camera

### SPECIFICATIONS

<b>Camera</b>	
Image Device	Sony 1/2.9" Exmor™ image sensor
Effective Pixels	1920 x 1280 pixels
Lens	2.8 - 12mm 3M DC-IRIS
Iris	DC Iris
ICR	Mechanical, TDN
Min. Illumination	Color: 0.02 Lux @ F1.4 (AGC ON) B/W: 0.005 Lux @ F1.4 (AGC ON)
<b>IP Video</b>	
Video Compression	H.264 and MJPEG simultaneously (Dual-encoders)
Video Profile	H.264 baseline, main, high profile
Profile Setting	Every video profile has Independent CBR/ VBR/ GOP/ Frame rate setting
Main Stream Resolution	1080P (1920 x 1080), 720P (1280 x 720), Q1080P (960 x 544)
Second Stream Resolution	720P (1280 x 720), Q1080P (960 x 544), D1 (720 x 576), VGA (640 x 480), Q720P (640 x 360), CIF (352 x 288), QVGA (320 x 240), QCIF (176 x 144)
Frame Rate	1fps - 25/30fps
Bit Rate	16 - 8000kbps
Electronic Shutter	Auto mode: 1/25 - 1/30000 sec Manual mode 1/25 - 1/10000 sec
Iris Exposure Control	Auto mode / Manual mode
AGC	LOW / MID-LOW / MID / MID-HIGH / HIGH
WDR	OFF / LOW / MID / HIGH
3-DNR	OFF / LOW / MID / HIGH
Color Mode	Normal / Natural / Bright
Image Setting	AE, AWB; 3D Noise reduction; WDR; Color, brightness, sharpness, contrast, Hue; Mirror/Flip; Privacy Masks; Text, time and date overlay
Streaming	Simultaneously multi-profile streaming; Streaming over UDP, TCP, HTTP, or HTTPS; M-JPEG streaming over HTTP (server push); Controllable frame rate and bandwidth; Constant and variable bit rate (MPEG4 / H.264)
On Screen Display	Text, time and date overlay
<b>Audio</b>	
Audio Encoder	RTSP: G.711 64kbps
Audio Streaming	One-way or two-way
Audio Input	External audio in
Audio Output	Speaker Out
<b>Network</b>	
Supported Protocols	IPv4, IPv6, TCP, UDP, HTTP, HTTPS, SMTP, FTP, NTP, DNS, DDNS, DHCP, ARP, Bonjour, UPnP, RTSP, RTP, RTCP, IGMP, PPPoE, ICMP, SNMP
Security	Password protection, HTTPS encrypted data transmission, user access log
Users	4 simultaneous unicast users
Ethernet	10/100M auto negotiation
<b>System Integration</b>	
Supported Interface	ONVIF Profile S
Event Detection	Alarm in, motion detection, Network loss detection, camera tampering, video loss
Motion Detection	1-zone video motion detection with Sensitivity options
Privacy Mask	4 Zones
Camera Tampering	Camera Cover or Mask
Events Action	SNAP, Record video in SD card, send to FTP, send to Email, External output activation, voice alert, notify to CMS

# HIDC-2600TV


www.asia.security.honeywell.com

## 1080P High Definition H.264 IP Dome Camera


Camera	HIDC-2600TV
General	
OS	Windows XP or later
Browser	IE 8.0 or later
Supported Platform	Honeywell Universal Surveillance (HUS) and NVRs
Power Supply	12V DC or 24V AC $\pm 10\%$ external power adapter
PoE	IEEE 802.3af
Power consumption	Max 5W
Connectors	RJ-45 10Base-T/100Base-TX; 1 power jack; 2 alarm input and 1 output; Audio out; Audio input; Video out; SD card, and RS485
Edge Storage	32G
Operating Temperature	-20°C to 55°C
Operating Humidity	0% - 90% (non-condensing)
Dimensions	$\varnothing 136\text{mm} \times 118\text{mm}$
Weight	509g
Certificate	CE, FCC, UL

Note: Honeywell reserves the right, without notification, to make changes in product design or specifications.

## DIMENSIONS

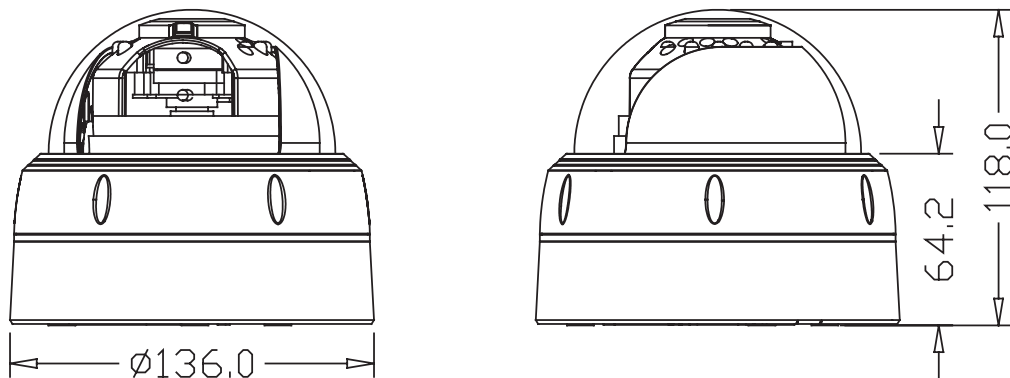

HICM (Ceiling Mount Bracket)

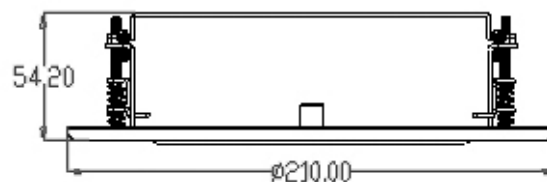

Unit: mm

# HIDC-2600TV

www.asia.security.honeywell.com

## 1080P High Definition H.264 IP Dome Camera

### ORDERING

HIDC-2600TV	1080P IP Dome Camera, 2.8~12mm, H.264 High-profile, TDN, WDR, ONVIF Profile S, Edge storage 32G, Tampering Detection, PoE, 24VAC/12VDC
HICM	Ceiling mounting bracket

For more information:

Security Asia Pacific Headquarters  
Security Australia Sales Hotline  
Security China Sales Hotline  
Security Hong Kong  
Security India

Tel: (86) 21 2219 6888  
Tel: 1300 234 234  
Tel: 400-8800-330  
Tel: (852) 2405 2323  
Tel: (91) 124 497 5000

Security Indonesia  
Security Korea  
Security Singapore  
Security Taiwan  
Security Thailand

Tel: (62 21) 536 52322  
Tel: (82) 2 799 6114  
Tel: (65) 6355 2828  
Tel: (886) 2 2245 1000  
Tel: (66) 2 693 3099

www.asia.security.honeywell.com  
security.ap@honeywell.com

Honeywell Security Group  
Honeywell International Inc.  
www.security.honeywell.com

Apr 2014  
© 2014 Honeywell International Inc.

