

CAHDC1080PI-V36

www.black.honeywell.com

1080P AHD Vandal-proof IR Dome Camera

Featuring the advanced Analog High Definition (AHD) video technology, the Honeywell Black™ CAHDC1080PI-V36 is a multi-megapixel HD analog camera which produces 1080P (1920H x 1080V) sharp, high definition image. The AHD technology ensures real-time and non compressed signal transmission of up to 500 meters via coaxial cable, which significantly reduces installation cost and provides much sharper images without quality loss.

Advanced Features

Featuring hybrid output definitions in CVBS (960P), AHD (720P) and AHD (1080P), the CAHDC1080PI-V36 is compatible with existing analog cameras, and is capable of transmitting HD image via existing cable layout.


Market Opportunities

Featuring 3.6mm built-in fixed lens, 1080P high resolution, TDN function and 20 meters IR night vision, the CAHDC1080PI-V36 is designed for small-to-medium HD surveillance application including hotels, chain stores, commercial offices, hospitals, residential areas, warehouses, and education facilities and so on. It is also ideal for easy and cost-effective upgrade of existing analog system to realize HD application.

FEATURES

- Ultra high definition: 1080P (1920H x 1080V)
- Hybrid output definitions in CVBS (960P), AHD (720P) and AHD (1080P) via OSD setup
- Minimum illumination: 0 Lux (IR on)
- TDN (IR-Cut), AWB, AGC
- 1/2.8" Sony Exmor 1080P Sensor
- 3.6mm 3 Megapixel lens
- IR distance: 20 meters
- Power: 12VDC
- IP67 weather-proof

DIMENSIONS

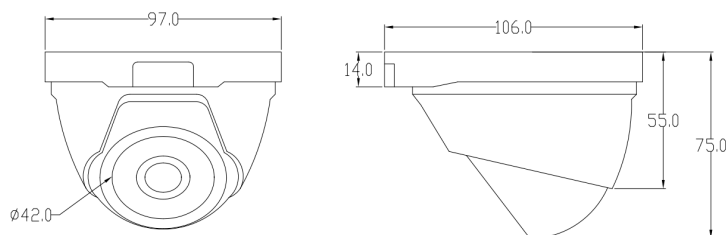

Unit: mm



CAHDC1080PI-V36

www.black.honeywell.com

1080P AHD Vandal-proof IR Dome Camera

SPECIFICATIONS

Model	CAHDC1080PI-V36
Image Sensor	1/2.8" Sony Exmor 322 CMOS sensor
Processor	NVP2441
Scanning System	Progressive scan method
Sensor Resolution	1080P
Effective Pixels	2.0 Megapixel (1920H x 1080V)
Output pixel	2.0 Megapixel (1920H x 1080V)
Shutter Speed	1/50- 1/100,000 sec
Minimum Illumination	Color: 0.001Lux B/W: 0 (IR-on)
Smart IR	NC
Video Output	CVBS and AHD output
S/N	More than 50dB (AGC off)
Picture Adjustments	ON/OFF
Gamma Correction	0.45
Lens	
Focus Length	3.6mm 3 Megapixel lens
Auto Iris Support	N/A
Night Vision	
Infrared Leds	8 Superflux Leds
IR Beam Distance	20m
ICR	ON/OFF
Camera Feature	
Day & Night	TDN, IR cut removable
Day / Night Mode	Auto (ICR) / Color / Black & White
Language	11 Languages (English / Chinese / Germany / French / Italian / Spanish / Polish / Romania / Russian / Portuguese / Dutch / Turkish)
White Balance	Auto / Manual
Auto Gain Control	ON/OFF
WDR	ON/OFF
Digital Noise Reduction	3D NR
Picture Adjustment	ON/OFF
OSD	DWDR / 3D / 2DNR / AGC / AWB / BLC / Anti-foggy / Privacy Mask / Mirror / DPC
Electrical Protection	Video protections Voltage 8K V; Surge protections Voltage: 1.8K V
Operating Temperature	-10°C~50°C
Storage Temperature	-30°C~60°C
Operating Humidity	20%~90%
Power Supply	12VDC
IP Rating	IP67
Dimension	Φ106mm X 75mm
Weight	0.5kg
Certificate	CE, FCC, C-tick

Note: Honeywell reserves the right, without notification, to make changes in product design or specifications

CAHDC1080PI-V36

www.black.honeywell.com

1080P AHD Vandal-proof IR Dome Camera

ORDERING

CAHDC1080PI-V36	Weather-proof IR Dome Camera, 1080P, 1/2.8" Sony Exmor 322 CMOS sensor, TDN, 3.6mm 3 megapixel fixed lens, IR distance: 20m, 12VDC, PAL or NTSC
-----------------	---

For more information:

Security East Asia
Security Pacific
Security India
Security Middle East & N.Africa
Security Russia
Security China
Security Korea

Tel: (852) 2405 2323
Tel: 1300 234 234
Tel: (91) 124 4975000
Tel: (971) 4454 1704
Tel: (7) 495 7979371
Tel: (86) 400 8800 330
Tel: (82) 2799 6114



www.black.honeywell.com
security.black@honeywell.com

Honeywell Security & Fire
Automation & Control Solutions
Honeywell International Inc.
www.security.honeywell.com



Nov 2015
© 2015 Honeywell International Inc.